


# IG-12GM

## 01&02 TYPE

REDUCTION RATIO	L	REDUCTION RATIO	L
1/4	12.8	1/256	22.7
1/16	16.1	1/1024	26.0
1/64	19.4	1/4096	29.3



外形尺寸 APPEARANCE SIZE

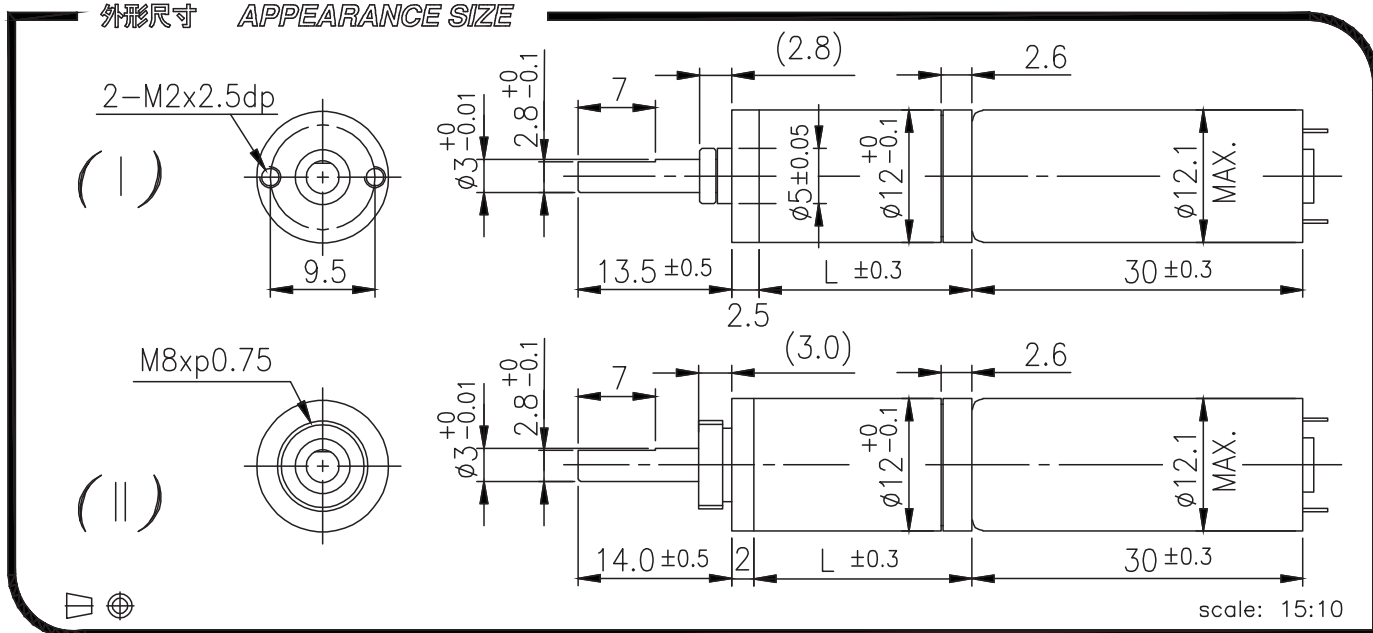

GEARED MOTOR TORQUE/SPEED

2.4V	減速比 Reduction ratio	1/4	1/16	1/64	1/256	1/1024	1/4096
	定格扭力(g-cm) Rated torque	20	70	250	840	2000	2000
定格回轉數(rpm) Rated speed	2400	600	150	38	10	2.8	

3.0V	減速比 Reduction ratio	1/4	1/16	1/64	1/256	1/1024	1/4096
	定格扭力(g-cm) Rated torque	19	65	230	780	2000	2000
定格回轉數(rpm) Rated speed	2400	610	150	39	10	2.8	

馬達單體型式 / MOTOR DATA

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格回轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
2.4	6.0	10000	≤ 450	12500	≤ 130	0.62	13
3.0	5.6	10000	≤ 340	12500	≤ 80	0.59	13

馬達單體特性圖 / MOTOR CHARACTERISTICS

