


IG-22CGM

03&04 TYPE



REDUCTION RATIO	L	REDUCTION RATIO	L
1/5	23.3	1/246~1/735	41.9
1/18~1/25	29.5	1/1079~1/3968	48.1
1/66~1/136	35.7		

外形尺寸 APPEARANCE SIZE

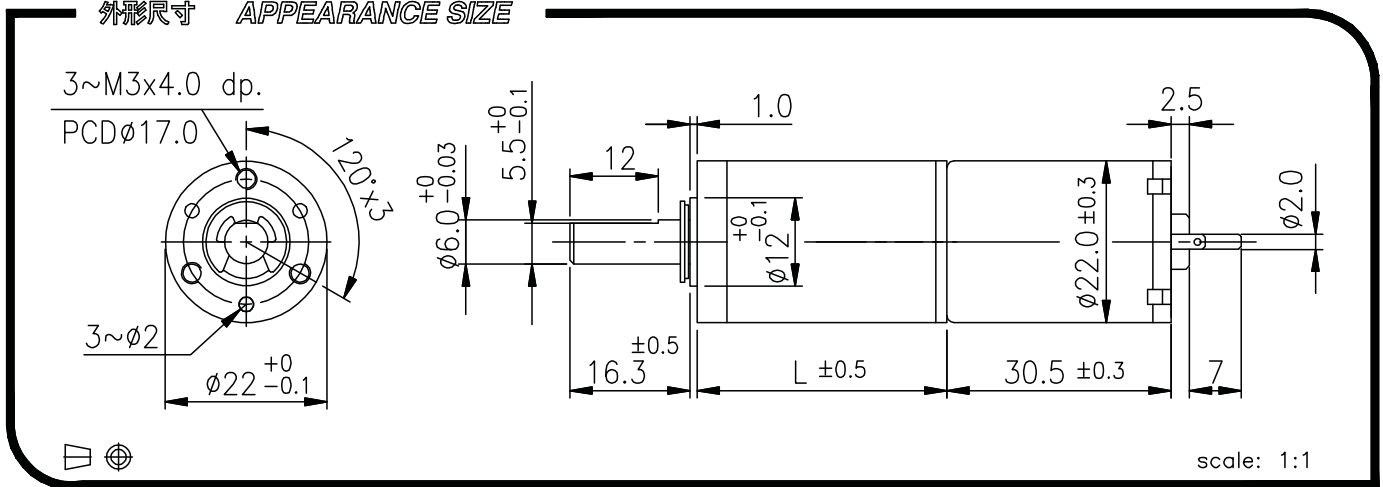

GEARED MOTOR TORQUE/SPEED

	減速比 Reduction ratio	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
		5	18	20	25	66	77	90	110	136	246	336	393	484	597	735	1079	1475	2124
12V	定格扭力(g-cm) Rated torque	170	560	650	820	1800	2100	2450	3000	3700	5000	5000	5000	5000	5000	6000	6000	6000	6000
	定格回轉數(rpm) Rated speed	1500	400	340	280	105	94	80	65	53	29	22	19	15.5	12.5	10	7.1	5.3	3.8
24V	定格扭力(g-cm) Rated torque	190	640	750	930	2000	2400	2800	3500	4000	5000	5000	5000	5000	5000	6000	6000	6000	6000
	定格回轉數(rpm) Rated speed	1600	420	350	290	110	98	84	68	55	31	23	20	16	13	10.5	7.4	5.5	3.9

馬達單體型式 / MOTOR DATA

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格回轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	46	7230	≤ 500	9000	≤ 120	3.41	43
24	53	7550	≤ 300	9000	≤ 80	4.11	43

馬達單體特性圖 / MOTOR CHARACTERISTICS

