

# IG-22PGM **NEW**

## 03&04 TYPE





REDUCTION RATIO	L	REDUCTION RATIO	L
1/4	14.40	1/198~1/455	25.35
1/14~1/19	18.05	1/742~1/1996	29.00
1/53~1/104	21.70		

外形尺寸 APPEARANCE SIZE

4~M2x4.0 dp.

PCD  $\phi 18$

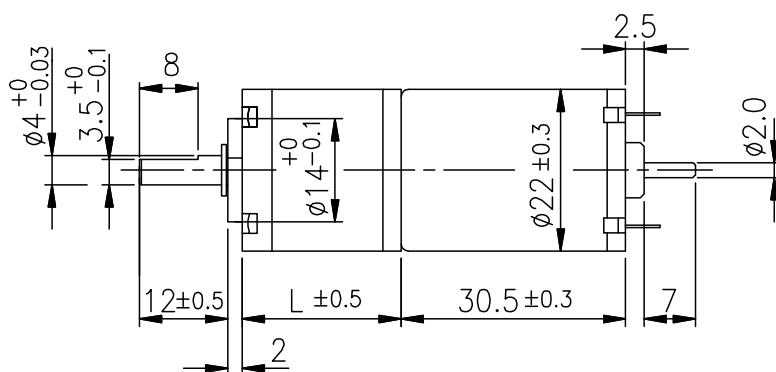

scale: 1:1

GEARED MOTOR TORQUE/SPEED

	減速比 Reduction ratio	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
		4	14	16	19	53	62	72	84	104	198	231	270	316	370	455	742	1014	1249	1621
12V	定格扭力(g-cm) Rated torque	100	300	350	410	970	1100	1300	1500	1800	2300	2300	2300	2300	2300	2700	2700	2700	2700	2700
	定格回轉數(rpm) Rated speed	1000	340	290	245	90	77	66	56	46	24	21	18	16	13.5	11	7.3	5	4.2	3.3
24V	定格扭力(g-cm) Rated torque	120	360	420	490	1150	1300	1500	1800	1800	2300	2300	2300	2300	2300	2700	2700	2700	2700	2700
	定格回轉數(rpm) Rated speed	1000	330	280	240	89	76	65	55	46	24	21	18	16	13.5	11	7.3	5	4.2	3.3

馬達單體型式 / MOTOR DATA

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格回轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	31	4790	≤ 240	6000	≤ 80	1.52	43
24	37	4710	≤ 145	6000	≤ 55	1.79	43

馬達單體特性圖 / MOTOR CHARACTERISTICS

