


IG-42HGM

03&04 TYPE



REDUCTION RATIO	L	REDUCTION RATIO	L
1/15~1/25	39.2	1/180~1/720	52.6
1/51~1/120	45.9	1/1062~1/3600	59.6

外形尺寸 APPEARANCE SIZE

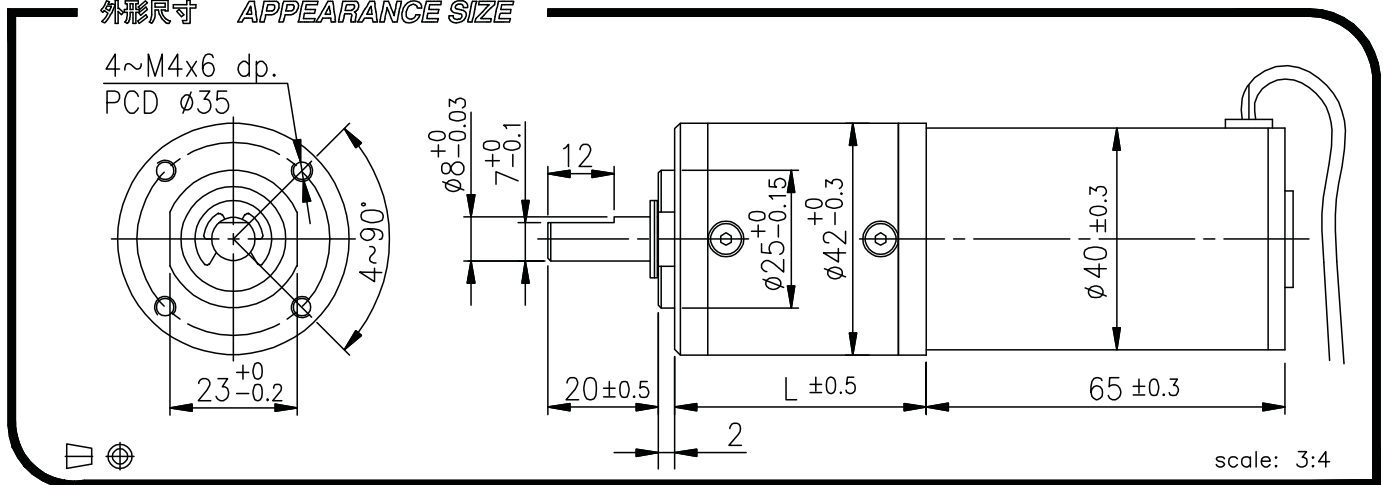

GEARED MOTOR TORQUE/SPEED

減速比 Reduction ratio	1/15	1/17	1/20	1/25	1/51	1/64	1/84	1/100	1/120	1/180	1/222	1/294	1/500	1/600	1/720	1/1062	1/1470	1/2500	1/3000	1/3600
12V 定格扭力(Kg-cm) Rated torque	4.4	5.0	6.0	7.6	13	16	18	20	20	25	25	25	30	30	30	30	30	30	30	30
12V 定格回轉數(rpm) Rated speed	250	220	187	148	73	59	45	38	32	21.3	17.3	13.4	8	6.7	5.6	3.8	2.7	1.6	1.4	1.2
24V 定格扭力(Kg-cm) Rated torque	3.2	4.1	4.9	6.2	10	13	17	20	20	25	25	25	30	30	30	30	30	30	30	30
24V 定格回轉數(rpm) Rated speed	255	223	190	150	74	59	45	38	31.8	21.2	17.2	13.4	8	6.7	5.6	3.8	2.7	1.6	1.4	1.2

馬達單體型式 / MOTOR DATA

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格回轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	430	3750	≤ 2000	4500	≤ 500	16.56	310
24	350	3800	≤ 820	4500	≤ 220	13.65	310

馬達單體特性圖 / MOTOR CHARACTERISTICS

