


# IG-28GM

## 03&04 TYPE

REDUCTION RATIO	L	REDUCTION RATIO	L
1/4~1/5	24.5	1/51~1/139	37.3
1/14~1/35	30.9	1/189~1/939	43.7



外形尺寸 APPEARANCE SIZE

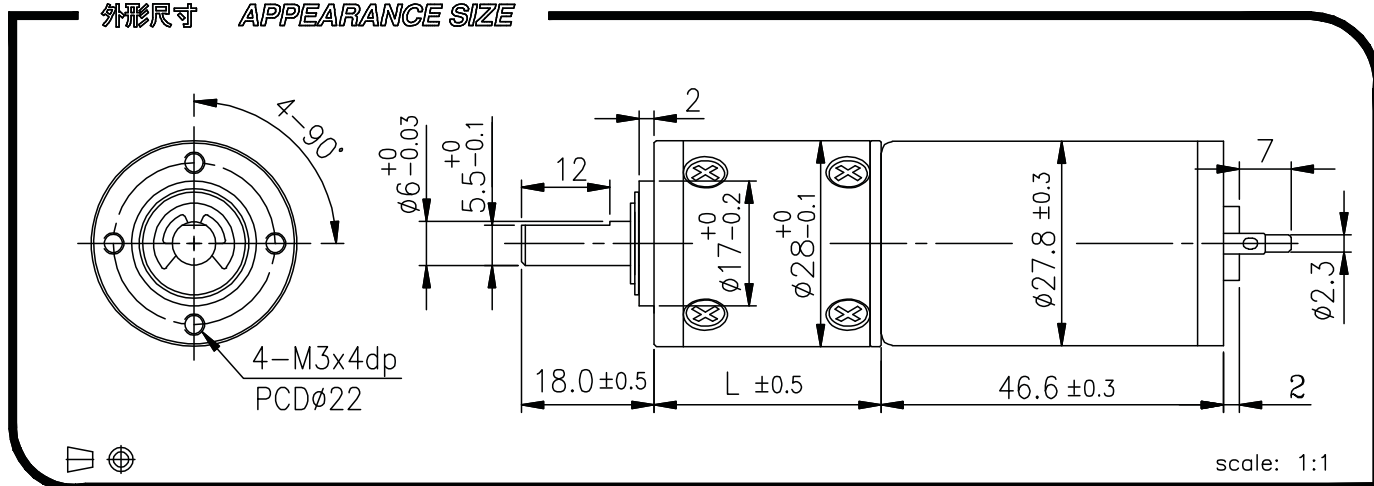

GEARED MOTOR TORQUE/SPEED

	減速比 Reduction ratio	1/5	1/14	1/19	1/27	1/35	1/51	1/71	1/100	1/139	1/189	1/264	1/516	1/721	1/939				
		12V	0.32	0.75	1.0	1.4	1.9	2.4	3.3	4.7	6.6	7.4	10	10	10	10			
	定額扭力(Kg-cm) Rated torque																		
	定額回轉數(rpm) Rated speed	1000	375	270	193	148	102	73	52	37.3	27.5	19.7	10.5	7.5	5.7				
24V	0.38	0.9	1.2	1.7	2.3	2.8	4.0	5.6	7.8	8.8	10	10	10	10					
	定額扭力(Kg-cm) Rated torque																		
	定額回轉數(rpm) Rated speed	990	370	265	191	147	101	72	51.5	36.9	27.2	19.3	10.4	7.4	5.7				

馬達單體型式 / MOTOR DATA

定額電壓 Rated volt (V)	定額扭力 Rated torque (g-cm)	定額回轉數 Rated speed (rpm)	定額電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定額出力 Rated output (W)	重量 Weight (g)
12	79	5200	≤ 500	6000	≤ 130	4.22	93
24	94	5140	≤ 300	6000	≤ 80	4.96	91

馬達單體特性圖 / MOTOR CHARACTERISTICS

