


IG-80WGM

01&02 TYPE



REDUCTION RATIO	L	REDUCTION RATIO	L
1/4	49.3	1/186~1/647	98.8
1/13~1/21	65.8		
1/49~1/117	82.3		

外形尺寸 APPEARANCE SIZE

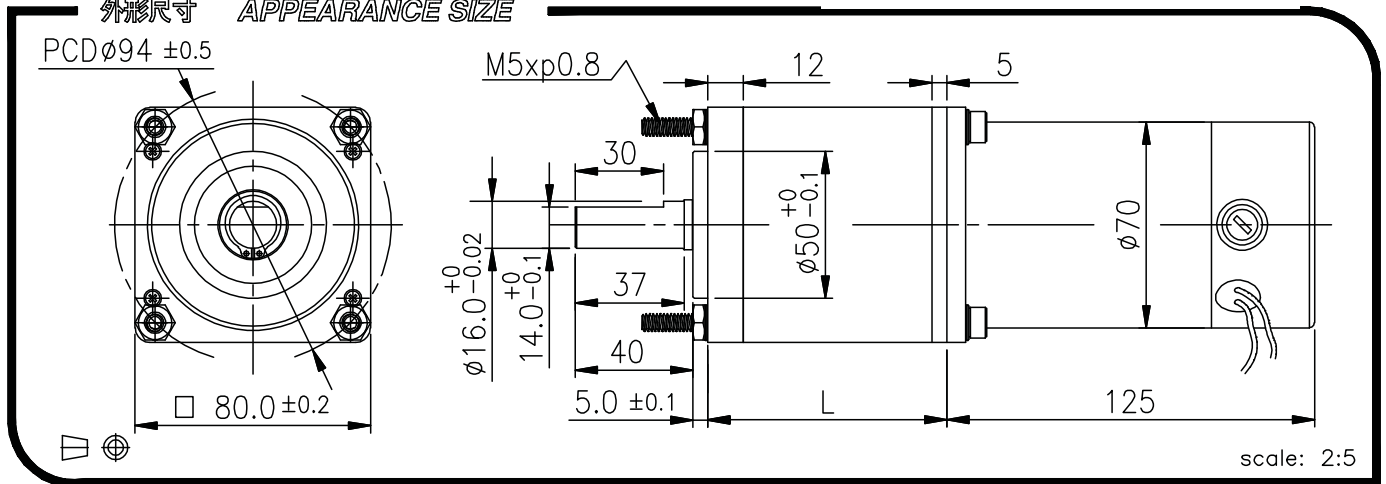

GEARED MOTOR TORQUE/SPEED

	減速比 Reduction ratio	1/4	1/13	1/15	1/19	1/21	1/49	1/55	1/71	1/80	1/103	1/117	1/186	1/210	1/306	1/393	1/445	1/571	1/647
12V	定格扭力(Kg-cm) Rated torque	6.0	18	20	26	29	58	66	85	96	123	125	125	125	125	125	125	125	125
12V	定格回轉數(rpm) Rated speed	720	210	185	145	130	56	49	38	34	26.5	23.5	15	13.4	9.3	7.3	6.5	5.1	4.5
24V	定格扭力(Kg-cm) Rated torque	8.8	26	29	37	42	84	95	123	125	125	125	125	125	125	125	125	125	125
24V	定格回轉數(rpm) Rated speed	730	215	190	149	133	57	50	39	35	27.5	24	15.4	13.7	9.6	7.5	6.7	5.2	4.6

馬達單體型式 / MOTOR DATA

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格回轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	2000	2750	≤ 6300	3200	≤ 1400	56.5	1650
24	2900	2800	≤ 4400	3200	≤ 850	83.4	1650

馬達單體特性圖 / MOTOR CHARACTERISTICS

