


# IG-62GM

## 01&02 TYPE



REDUCTION RATIO	L	REDUCTION RATIO	L
1/3~1/4	43.6	1/150~1/676	90.1
1/12~1/19	59.1		
1/43~1/113	74.6		

外形尺寸 APPEARANCE SIZE

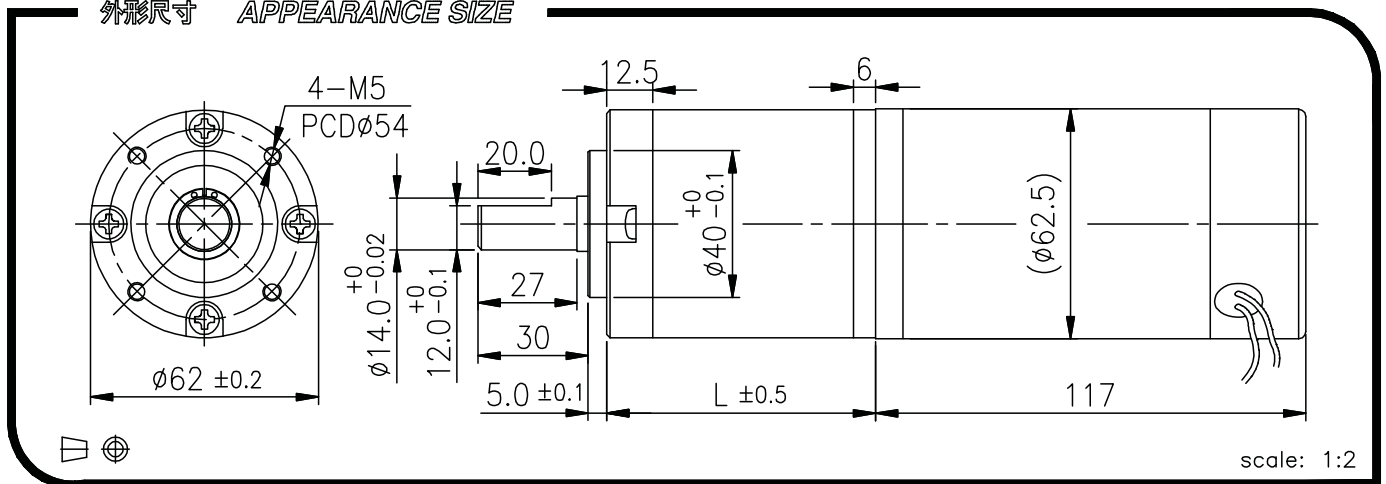

GEARED MOTOR TORQUE/SPEED

	減速比 Reduction ratio	1/3	1/4	1/12	1/15	1/19	1/43	1/53	1/66	1/81	1/100	1/113	1/150	1/230	1/285	1/353	1/488	1/546	1/676		
		12V	定格扭力(Kg-cm) Rated torque	2.5	3.0	7.5	9.4	11.8	23	28	35	43	54	61	67	100	100	100	100	100	100
	定格回轉數(rpm) Rated speed	480	390	135	110	90	39.5	32	25.7	21	17	15	11	7.3	6.0	5.0	3.7	3.3	2.7		
24V	定格扭力(Kg-cm) Rated torque	4.2	5.1	12.5	15.7	19.7	38	47	59	72	90	100	100	100	100	100	100	100	100		
	定格回轉數(rpm) Rated speed	500	400	140	115	93	40.5	33	26.5	21.5	17.5	15.4	11.7	7.8	6.3	5.3	3.8	3.4	2.8		

馬達單體型式 / MOTOR DATA

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格回轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	900	1700	≤ 1800	2000	≤ 450	15.7	1650
24	1500	1750	≤ 1500	2000	≤ 300	26.9	1650

馬達單體特性圖 / MOTOR CHARACTERISTICS

