


IG-52GM

01&02 TYPE



REDUCTION RATIO	L	REDUCTION RATIO	L
1/3~1/4	53.0	1/43~1/113	84.0
1/12~1/19	68.5	1/150~1/676	99.5

外形尺寸 APPEARANCE SIZE

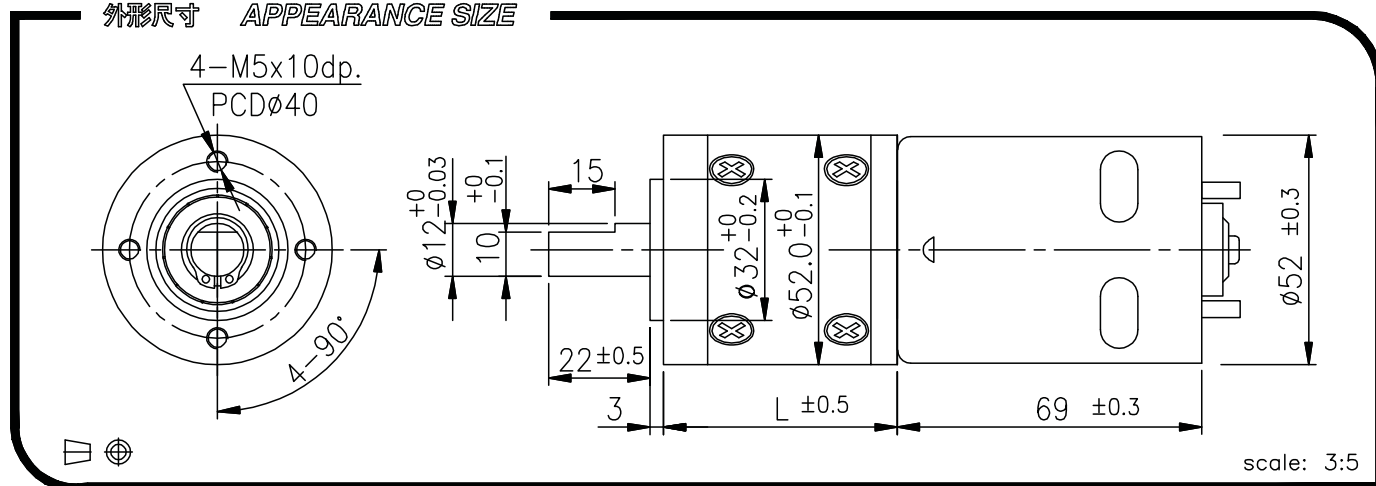

GEARED MOTOR TORQUE/SPEED

	減速比 Reduction ratio	1/3	1/4	1/12	1/15	1/19	1/43	1/53	1/66	1/81	1/100	1/113	1/150	1/230	1/285	1/353	1/488	1/546	1/676	
12V	定格扭力(Kg-cm) Rated torque	1.3	1.65	4.1	5.0	6.3	12	15	19	23	28	32	36	55	68	84	100	100	100	
	定格回轉數(rpm) Rated speed	1560	1260	450	369	305	130	105	85	68.5	55.5	49.5	37	24	19.5	15.5	11.5	10.4	8.3	
24V	定格扭力(Kg-cm) Rated torque	1.8	2.2	5.5	6.8	8.5	16	20	25	31	39	44	48	74	92	100	100	100	100	
	定格回轉數(rpm) Rated speed	1520	1230	444	359	290	127	102	83	66.5	54	48	36	23.5	19	15.5	11.6	10.5	8.4	

馬達單體型式 / MOTOR DATA

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格回轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	480	5600	≤ 5600	6000	≤ 1750	58.6	480
24	650	5450	≤ 2750	6000	≤ 750	48.3	480

馬達單體特性圖 / MOTOR CHARACTERISTICS

