



IG-70WGM

01&02 TYPE

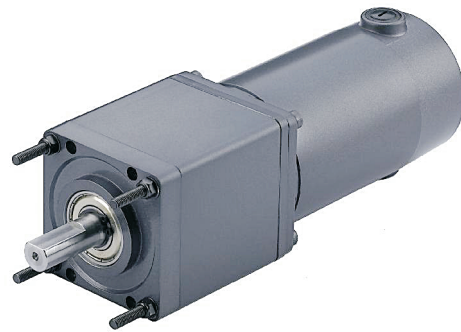

REDUCTION RATIO	L	REDUCTION RATIO	L
1/4	47.3	1/189~1/611	96.8
1/13~1/20	63.8		
1/50~1/126	80.3		

外形尺寸 APPEARANCE SIZE

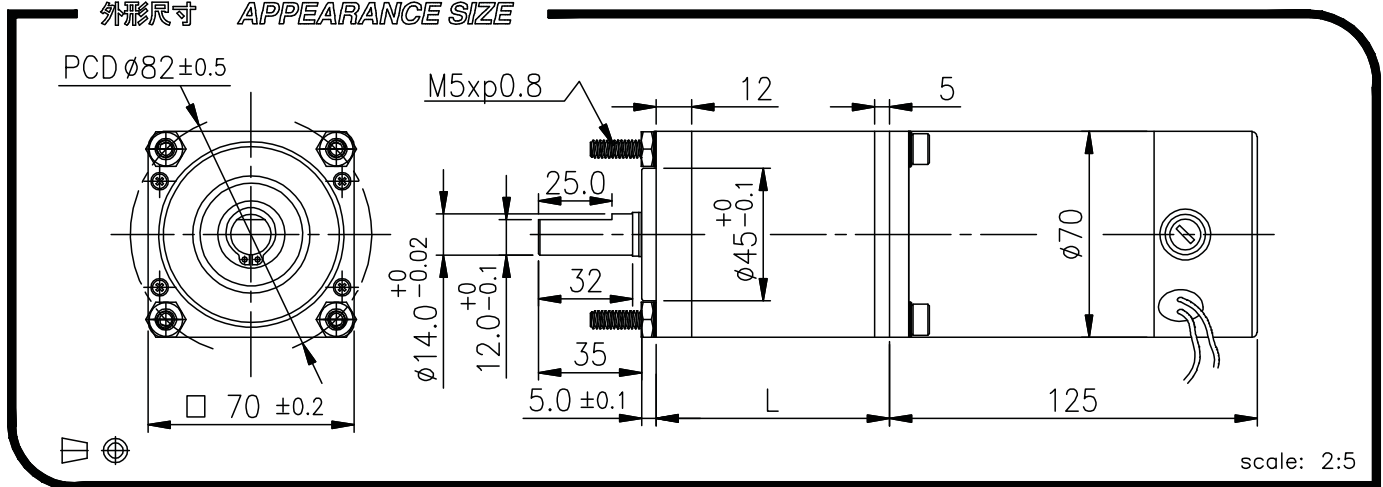

GEARED MOTOR TORQUE/SPEED

	減速比 Reduction ratio	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
		4	13	16	20	50	60	75	91	102	126	189	242	300	363	414	493	543	611		
12V	定格扭力(Kg-cm) Rated torque	4.2	13.8	16.8	20.4	44.9	54	67	81	91	113	125	125	125	125	125	125	125	125		
	定格回轉數(rpm) Rated speed	510	135	112	90.9	36	29.7	24	19.7	17.6	14.2	9.5	7.5	6.2	5.1	4.4	3.7	3.4	3.0		
24V	定格扭力(Kg-cm) Rated torque	7	23.1	28	34.6	74.9	90.6	112	125	125	125	125	125	125	125	125	125	125	125		
	定格回轉數(rpm) Rated speed	510	135	112	90.9	36	29.7	24	19.8	17.7	14.3	9.6	7.6	6.3	5.2	4.5	3.8	3.5	3.1		

馬達單體型式 / MOTOR DATA

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格回轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	1500	1800	≤ 3000	2000	≤ 800	27.7	1650
24	2500	1800	≤ 2500	2000	≤ 400	46.2	1650

馬達單體特性圖 / MOTOR CHARACTERISTICS

